



3nh Global

SHENZHEN THREENH TECHNOLOGY CO., LTD.

Desktop Color Haze Meter YS6002-M


Support transmittance, haze, yellowness, whiteness, etc. measurement,
new national standard pharmacopoeia color measurement



7in color touch screen



Concave grating



360-780nm full spectrum



Camera positioning

It is widely used in haze analysis and transmittance test in the national standard pharmacopoeia color measurement, glass processing, plastic processing, film, display screen processing, packaging industry, liquid chemical analysis and other industries, and supports trace transmission measurement.




1. Instrument display



▲ Front



▲ Back

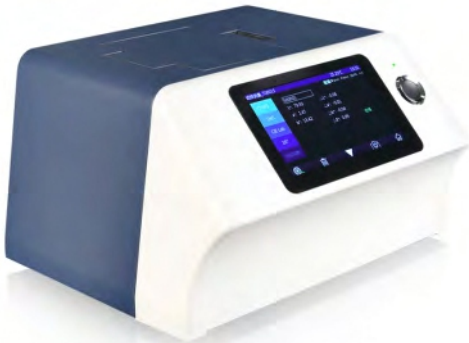

▲ Left side



▲ Right side

2. Instrument introduction

YS6002-M desktop transmittance color haze meter meets the transmission D/0 (diffuse illumination, 0° direction reception) geometric optical structure specified by CIE15 (can also achieve approximate transmission 0/0 (parallel light illumination/0° reception) geometrical optics). The illumination light source of the instrument is a 360-780nm composite full-spectrum LED light source (D65), and the spectrum acquisition at intervals of 10nm is achieved through a precision concave grating and a 256-pixel CMOS detector. Accurate testing of various optical indicators (haze, transmittance, chromaticity, chromatic aberration, yellowness, whiteness, cobalt platinum index, Gardner index, etc.)

3. Instrument Features


1. High hardware configuration

YS6002-M adopts 7in TFT pure color capacitive touch screen, easy to operate; large storage space, can store more than 20,000 pieces of data at most, and is equipped with concave grating for spectroscopic, more accurate measurement;




2. High optical configuration

154mm integrating sphere, concave grating, 256-pixel CMOS detector, dual optical paths with high optical resolution.

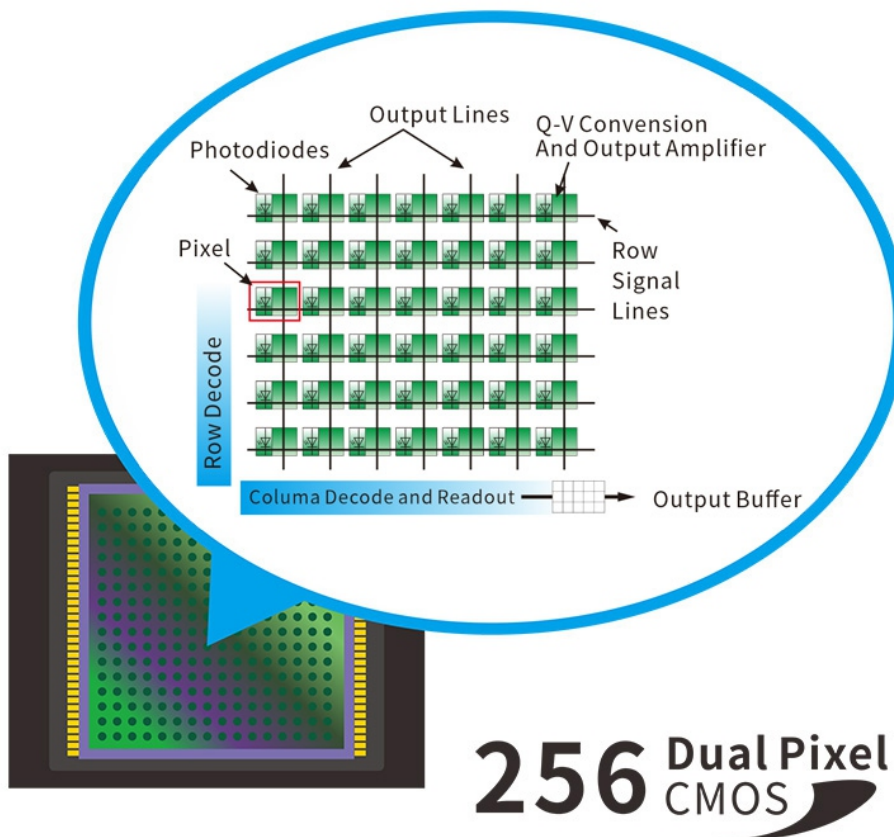


3. Using combined full-spectrum LED light source and UV light source

Adopt 360~780 full-spectrum combined LED light source with long life and low power consumption (close to D65 light source spectrum);

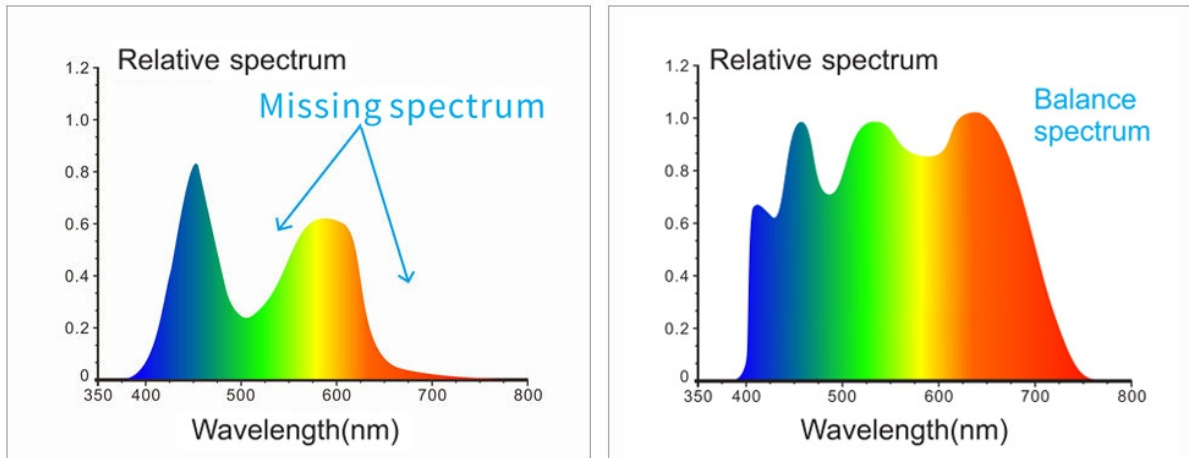


4. Various measurement indicators

Easily achieve accurate testing of C/A/D65 light source haze (ASTM D1003/1044), transmittance, cobalt platinum index, and Gardner index;

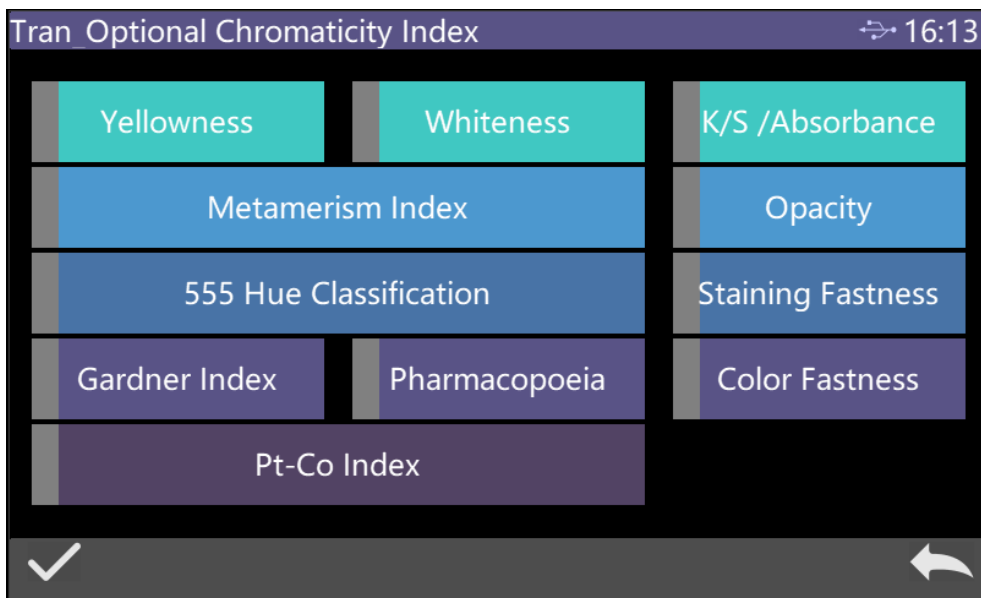


5. Multiple test modes

Support quality management mode and sample mode to meet the needs of more customers;

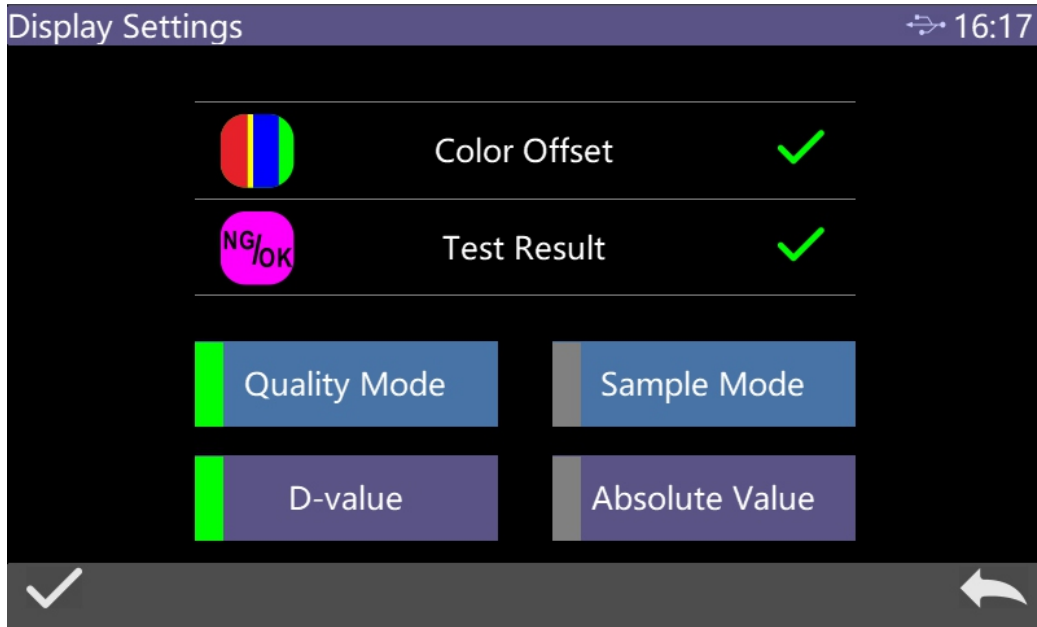

6. Measurement environment monitoring system


Independent light source detector and temperature sensor, constantly monitor light source and environmental changes to ensure reliable test data;

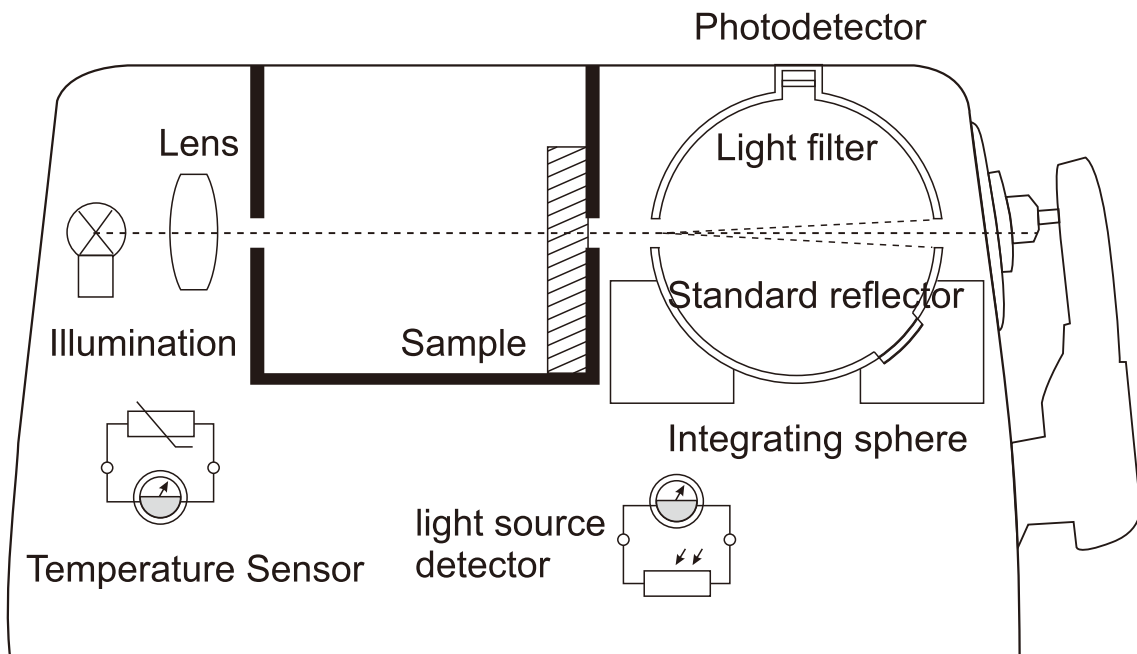


Color Haze Meter YS6002-M

7.a variety of light sources and color space options

Two standard observer angles of 2°/10°, a variety of light source modes, a variety of color systems, and a variety of standard chromaticity indicators to meet the needs of various customers for chromaticity testing;


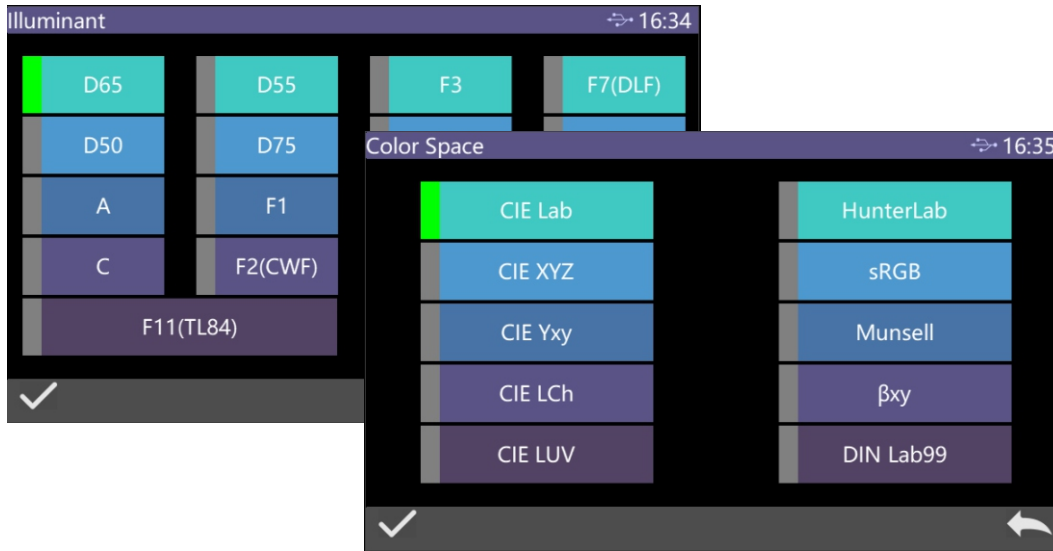


8. The PC-side software has powerful function expansion;

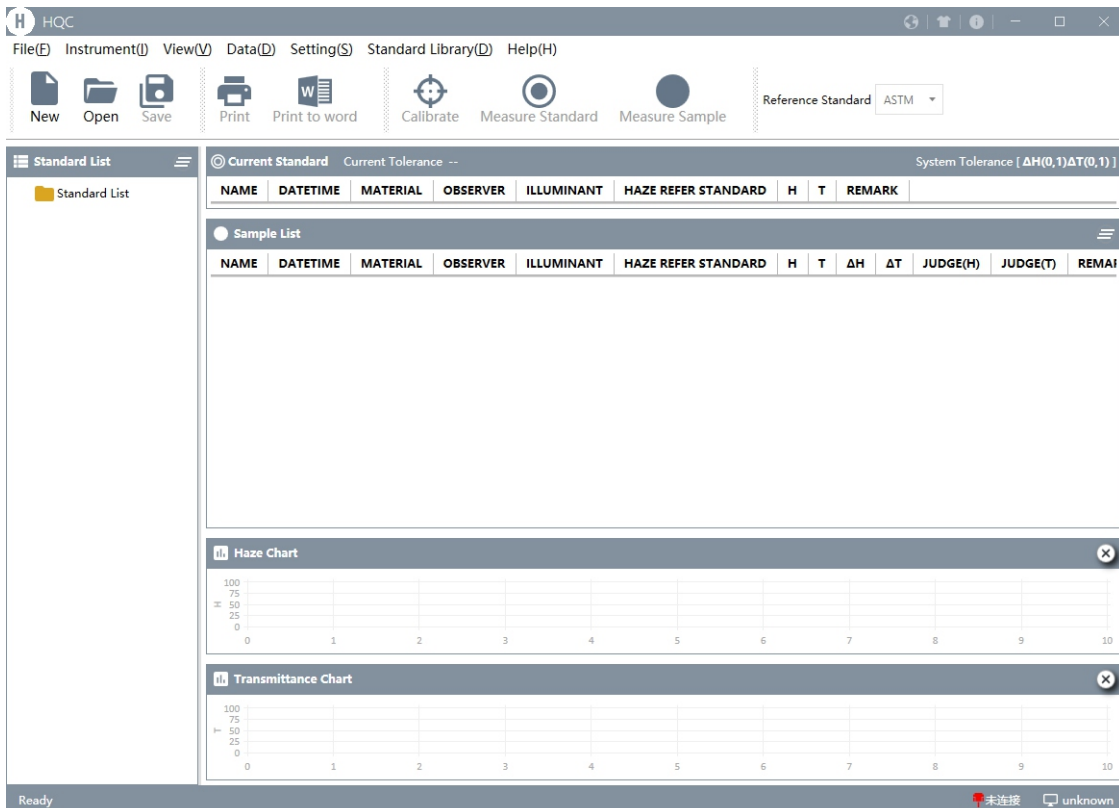

4. Application

It is widely used in haze analysis and transmittance test in the national standard pharmacopoeia color measurement, glass processing, plastic processing, film, display screen processing, packaging industry, liquid medicine analysis and other industries, and supports trace transmission measurement.

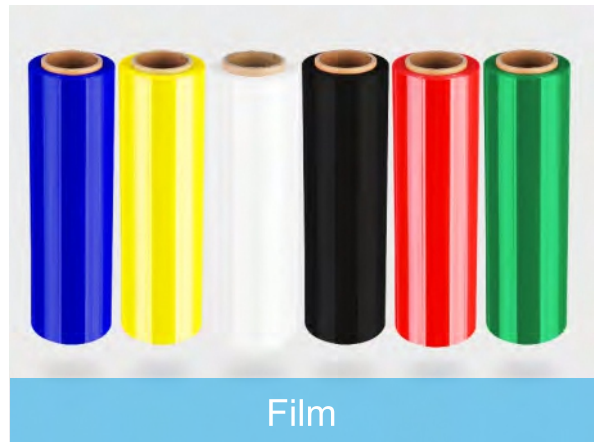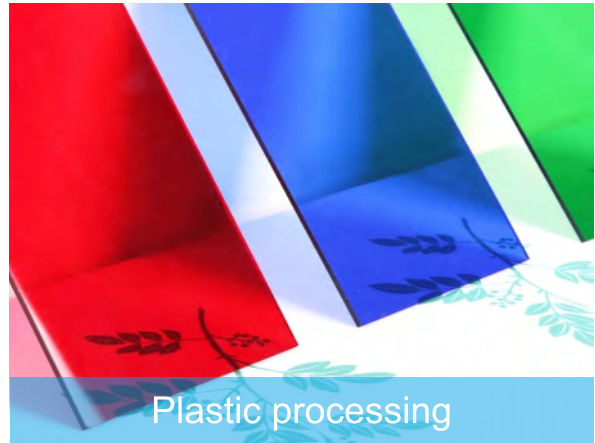

5. Packing list

【Standard accessories】

Benchtop Color Haze Meter



Power Adapter

Measuring diameter $\Phi 25.4\text{mm}$



USB cable



Manual



Certificate
Warranty Card




Calibrate the
whiteboard/black tube



Transmission black baffle



Sample holder



Transmission dish



Computer software
(download from official website)

【Optional accessories (sold separately)】



Micro printer

6. Product parameters

Model: YS6002-M
Illumination mode: transmission: D/0 (diffuse illumination, 0° direction reception); approximately CIE15 stipulates 0/0 (parallel light illumination/0° reception);
Standard: ASTM D1003/1044, CIE No.15, GB/T 3978, GB 2893, GB/T 18833, ASTM E308, DIN5033 Teil7
Integrating Sphere Size: Φ154mm
Light Source: 360 nm to 780 nm, Combined LED Light
Spectrophotometric Mode: Concave Grating
Sensor: 256 Image Element Double Array CMOS Image Sensor
Wavelength Interval: 10nm
Semiband Width: 10nm
Measured Reflectance Range: 0-200%
Measuring Aperture: Transmissive: Φ25.4mm, Φ4mm
Color SpaceCIE: LAB,XYZ,Yxy,LCh,CIE LUV,Musell,s-RGB,HunterLab,βxy,DIN Lab99
Color Difference Formula: $\Delta E^*ab, \Delta E^*uv, \Delta E^*94, \Delta E^*cmc(2:1), \Delta E^*cmc(1:1), \Delta E^*00$, DINΔE99,ΔE(Hunter)
Other Colorimetric Index: Haze (ASTM D1003/1044), Transmittance T, WI (ASTME313, CIE/ISO, AATCC, Hunter), YI (ASTM D1925, ASTM 313), TI (ASTME313, CIE/ISO), Metamerism Index Mt, Color fastness, color fastness, absorbance, APHA/Hazen/Pt-Co (platinum cobalt index), Gardner index, Saybolt (Seibert index), ASTM D1500 color scale, Chinese Pharmacopoeia chromaticity
Observer Angle: 2°/10°
Illuminant: D65,A,C,D50,D55,D75,F1,F2,F3,F4,F5,F6,F7,F8,F9,F10,F11,F12,CWF,DLF,TL83,TL84,TPL5,U30
Displayed Data: Spectrogram/values, Samples Chromaticity Values, Color Difference Values/graph, Pass/fail Result, Color Offset
Measuring Time: About 1.5s
Repeatability: Spectral transmittance: within 0.05% of standard deviation of test transmission reference white (400~700nm: within 0.04%);Chromaticity value: 25.4mm, within ΔE^*ab 0.03 (after the instrument is warmed up and calibrated, the average value of the transmission reference white is measured 30 times at an interval of 5s)
Inter-instrument Error: 25.4mm, within E^*ab 0.2 (the average value of the original 5 standard transmission color plates)
Dimension: L*W*H=370x300x200mm
Weight: Approx. 9.6kg
Power: AC 24V, 3A Power adapter power supply
Illuminant Life Span: 5 years, more than 3 million times measurements
Display: 7-inch TFT color LCD, Capacitive Touch Screen
Data Port: USB, Print serial port
Data Storage: Standard 5000 Pcs, Sample 20000 Pcs
Language: Simplified Chinese, Traditional Chinese, English
Standard accessories: power adapter, manual, quality management software (download from official website), data cable, reflection whiteboard, reflection black tube, transmission blackboard, 25.4 aperture, transmission test fixture assembly, micro-hole (4mm) transmission test fixture assembly



SHENZHEN THREEINH TECHNOLOGY CO., LTD.

Address:F/6, Block 5B, Skyworth Inno Valley, Tangtou 1st Road,
Shiyan, Baoan District, Shenzhen, P.R. China

Service Hotline: 400-666-2522

Email: 3nh@3nh.com

Tel: 86-0755-26508999

Fax: 86-0755-27190609